


CULT

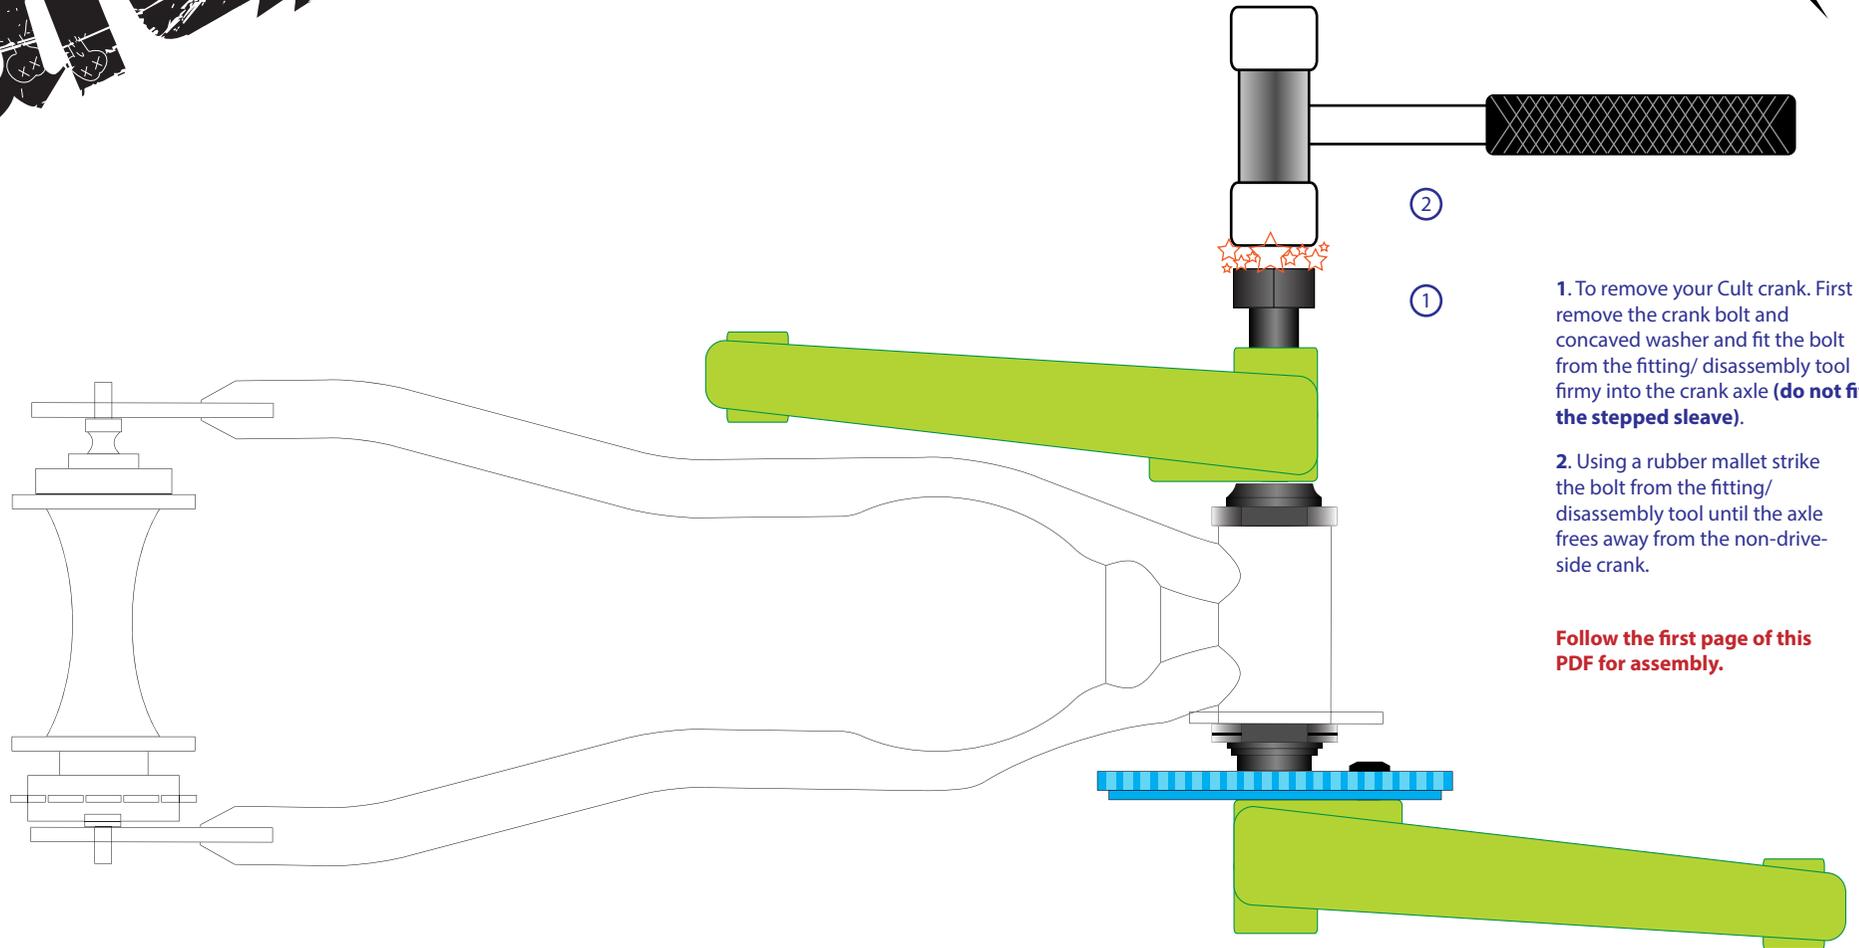

②

①

1. To remove your Cult crank. First remove the crank bolt and concaved washer and fit the bolt from the fitting/ disassembly tool firmly into the crank axle (**do not fit the stepped sleeve**).

2. Using a rubber mallet strike the bolt from the fitting/ disassembly tool until the axle frees away from the non-drive-side crank.

Follow the first page of this PDF for assembly.